



# SOLUTION

## **AE<sup>NT</sup>** SERIES

SINGLE AC SERVO-DRIVE  
TURRET PUNCH PRESSES



# AE-NT SERIES

## SINGLE AC SERVO-DRIVE TURRET PUNCH PRESSES





### COMPACT, ECO-FRIENDLY AND INTELLIGENT NEW TURRET PUNCH PRESS

AMADA have installed over 30,000 turret punch presses across the world. The AE-NT series builds on our knowledge and experience, combining AMADA's original, highly rigid 'bridge frame' construction, a single AC servo motor punch action, small footprint and large capacity turret. These factors ensure stable, high speed, high quality processing of the most demanding production. Many process integration functions and an environmentally driven design provide a very cost efficient performance.



Photograph may include optional equipment

## TYPICAL PROCESSING SAMPLES

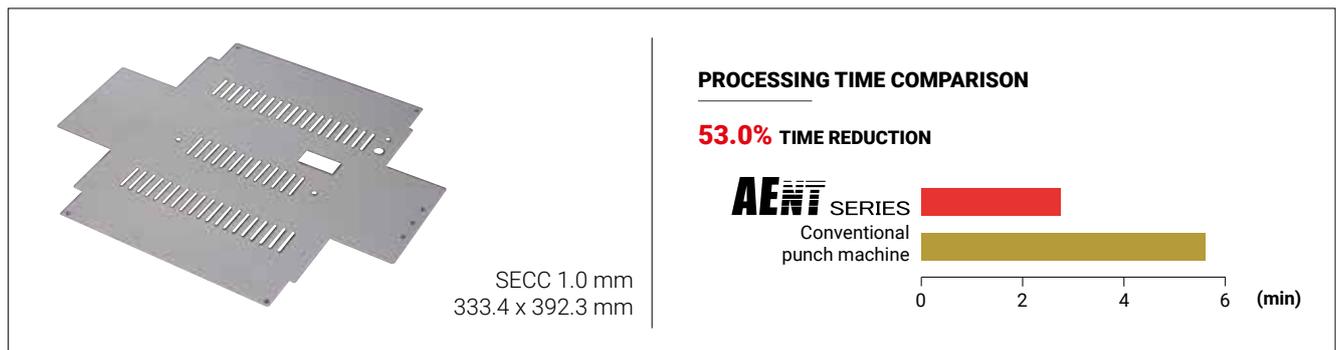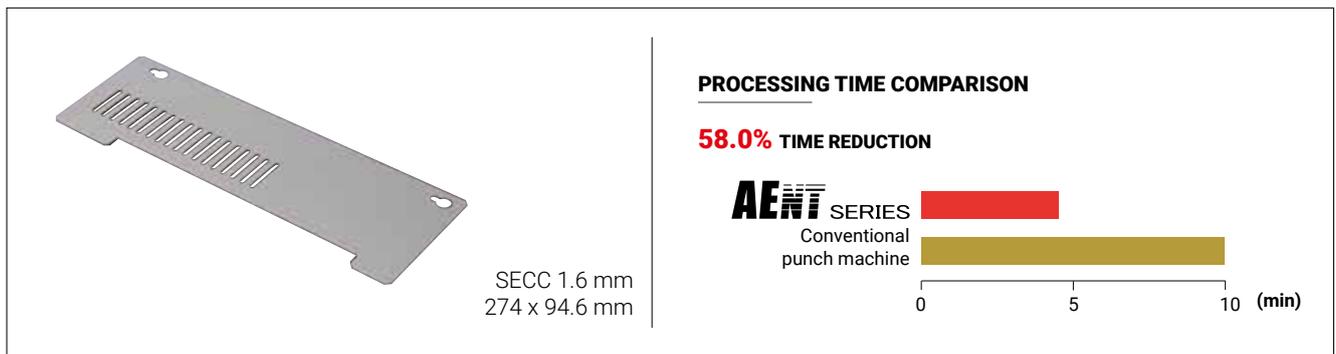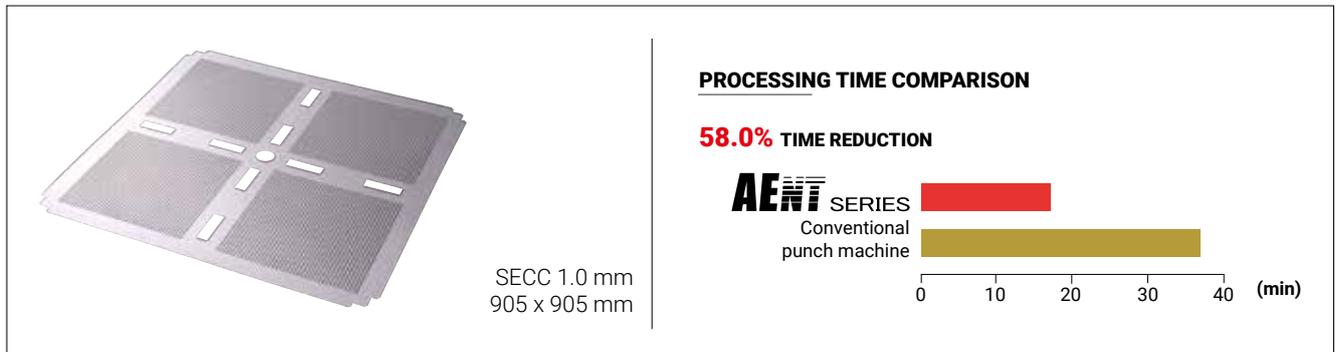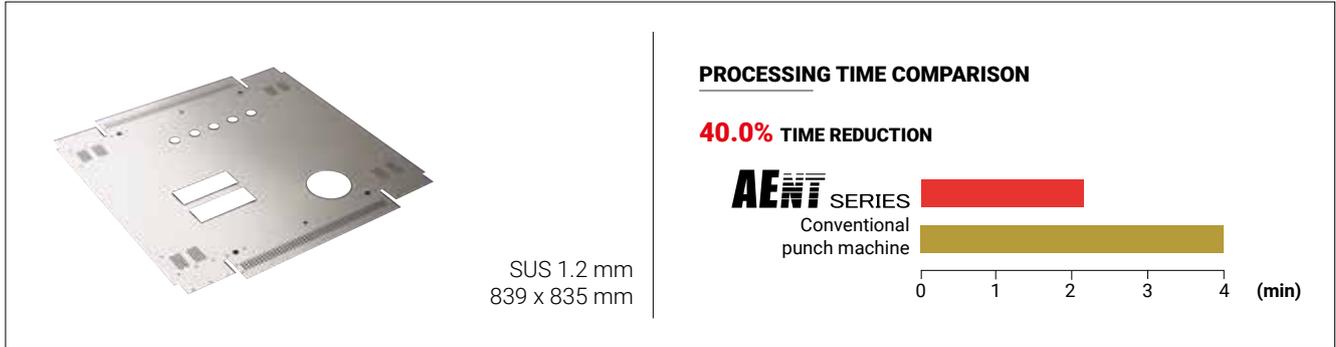


## ACHIEVEMENT OF STABLE, HIGH SPEED PROCESSING

### POWER VACUUM SYSTEM

#### STABLE, HIGH SPEED PROCESSING ACHIEVED BY REDUCED SLUG-PULL

The Power Vacuum system creates an area of lower pressure below the small station dies to 'suck' the slug away from the processing area. This also allows for a smaller punch penetration into the die (typically 1mm), resulting in higher speed processing. This function is also provided to the larger stations by the Slug Suction Unit.


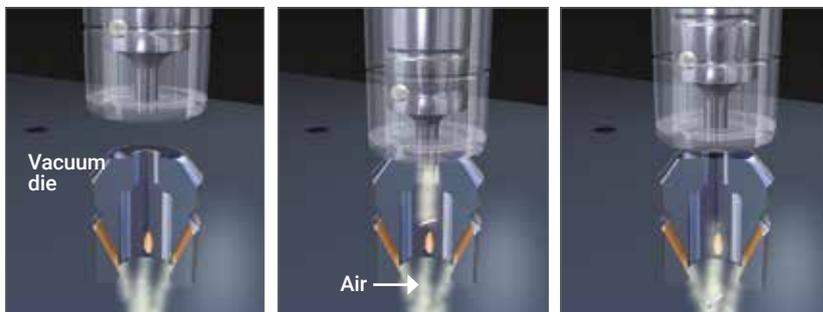


The Power Vacuum system sucks the slug down through the die due to the low pressure created below the slug.


### FINE CONTOURING

#### SPECIAL PROFILES CAN NOW BE PROCESSED WITH A HIGH QUALITY FINISH WITHOUT THE NEED FOR SPECIAL SHAPED TOOLS

Traditionally, it was not possible to use a nibbling pitch smaller than the material thickness. This is now achievable using the Fine Contouring tool. The need for secondary processes is eliminated and process time is dramatically reduced despite the increase in the number of hits.

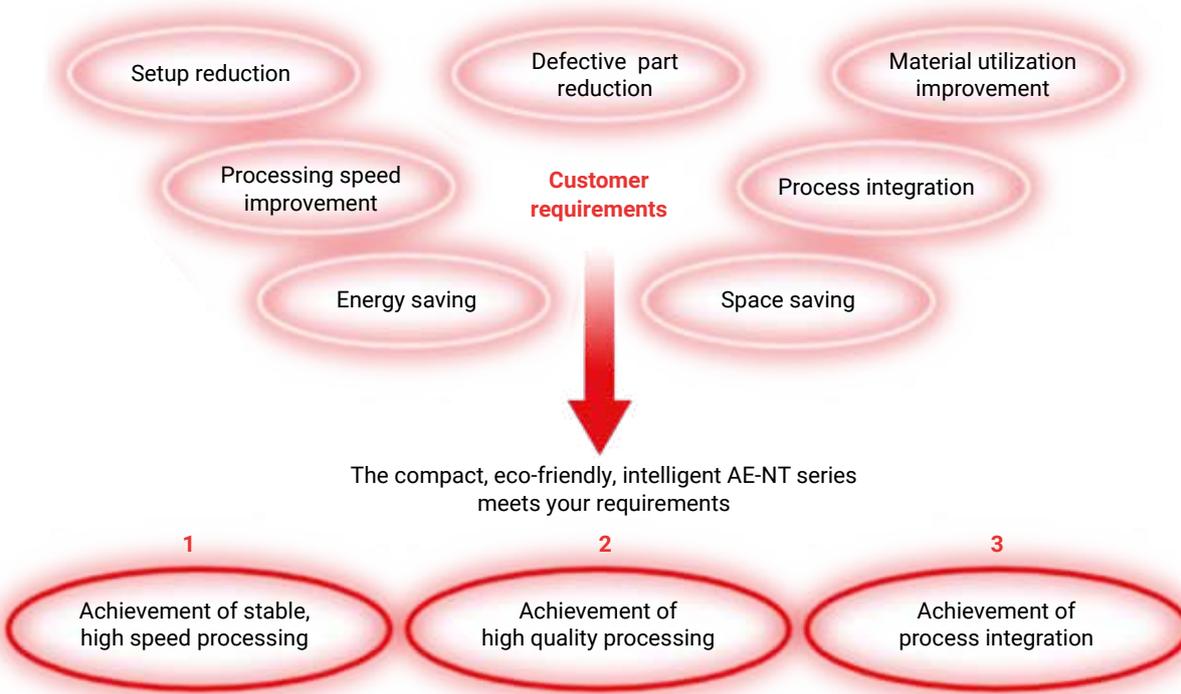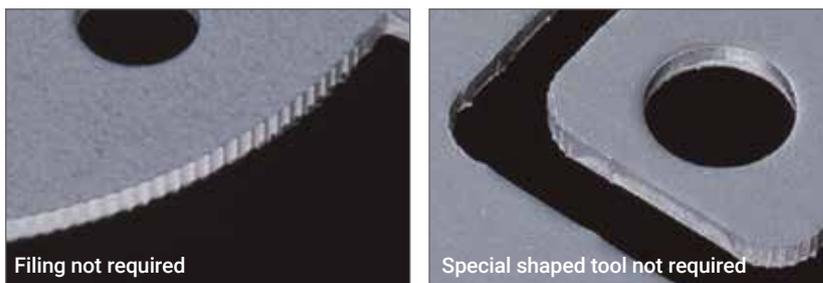


# ACHIEVEMENT OF HIGH QUALITY PROCESSING

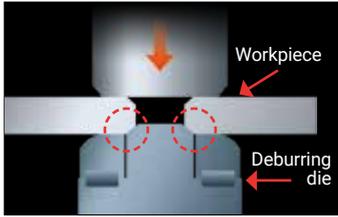


## High speed deburring

Time saving, in-cycle operation: After the slitting operation, the underside of the work piece is chamfered using a specific die to eliminate time consuming secondary processes and extra handling. Deburring tools can be manufactured to match the width of your slitting tool.

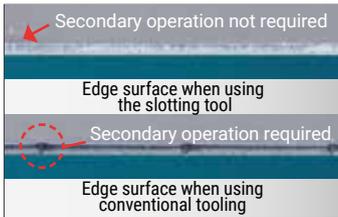

## Slotting

The removal of overlap marks, eliminating any remedial work. The slotting tool can produce overlap mark-free edges at any angle when installed in a 2" auto-index station.

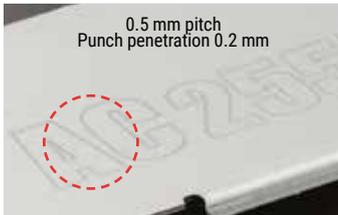

## High speed marking

Improve overall production efficiency when secondary operations are required. Part names, numbers, bend lines, weld positions and other important information can be quickly marked on the part at 900 hits/min to make any secondary operations more efficient.

# ACHIEVEMENT OF PROCESS INTEGRATION




## High speed forming

Special forms can be produced as part of the punching process. Forms such as offset bends and extrusions, which are usually separate processes, can be quickly integrated at any angle when used in conjunction with an auto-index station.



## Downward forming


Parts can be formed at high speed without damage or scratching. To avoid damage to down forms, such as burring and tapping, the floating brush table lifts the material away from the die before it is moved to the next punching position.

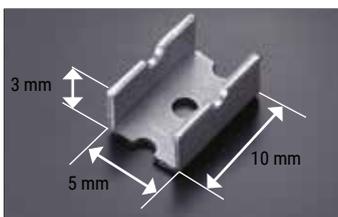

## Safety inch bending


Small flanges can be processed in-cycle. Small or rounded flanges that are traditionally difficult to gauge on a press brake can be incorporated into the punching process.

## FUNCTIONS AND OPTIONAL EQUIPMENT

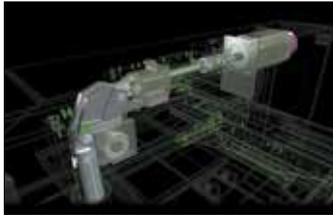

### Drive mechanism

The AE-NT series uses a single AC servo motor system capable of achieving a hit rate of 900 hits/min. The press drive mechanism, which is housed within the bridge frame, uses a highly durable ball screw and link combination that ensures stable, high speed processing with high productivity.

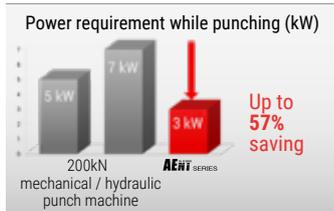


### Ecology

The AE-NT series consumes as little as 3kW of power while punching and has extremely low standby power requirements. Other environmental considerations, such as the elimination of hydraulic oil (and subsequently its disposal), add to the AE-NT's benefits.



### Intelligence

The network ready AMNC-F control system provides built-in intelligence for many aspects of the machine operation. Tooling setup, program editing and highly accurate press control solutions improve functionality and performance. Other features, such as tonnage monitoring, keep the machine operating at its full potential.

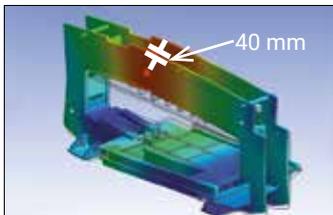

### High rigidity

At 40 mm thick, the bridge frame of the AE-NT series is one of the most robust available. The high rigidity provided by this allows for high speed, high accuracy, stable processing for the entire life of the machine.




### Large capacity turret

AMADA's high capacity, thick turret configuration allows 45 tools to be loaded quickly and easily. The 120 mm thick upper turret securely guides the tools during operation to provide high accuracy processing.



### Tool balancer

The tool balancer is used to load/unload large size tools in the turret. It facilitates and accelerates the setup of tools, alleviates the workload of the operator, and enhances the operating rate of the AE-NT series.

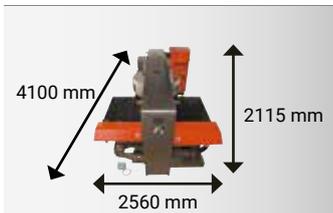

### Space-saving


With no need for a chiller to cool hydraulic components, the AE-NT offers a compact layout and an efficient, productive design.

# A BRIDGE BETWEEN ERP AND AMADA ECO-SYSTEM

AMADA Order Manager (AOM) is the new cloud-based platform created by AMADA.

Thanks to the AMADA standard data exchange interface, the customer's existing ERP system can be easily connected to AOM to allow the production data to be sent to the AMADA machines and for collecting the machine production data.

AMADA provides a suite of perfectly integrated software products. Each software technology can take advantage of the VPSS concept (Virtual Prototype Simulation System) to lead to a total, enhanced and error-free production with AMADA machines.

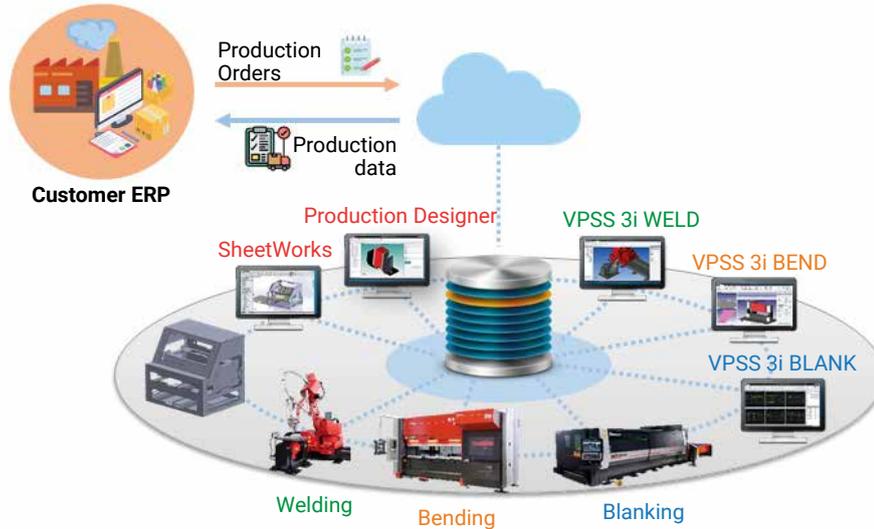

## AUTOMATION OPTIONS

**ONLY AE-2510NT AND AE-2610NT** Please check model availability.

Modular automation solutions for load/unload operations



Loader



Sheet load/unload solutions



Part removal solutions



Auto storage

## LINE UP



AE-255NT



AE-2510NT



AE-2610NT

Unit : mm

## DIMENSIONS

### AE-255NT


(L) 4100 x (W) 2560 x (H) 2115

### AE-2510NT

(L) 4155 x (W) 5120 x (H) 2115

### AE-2610NT

(L) 4998 x (W) 5120 x (H) 2265

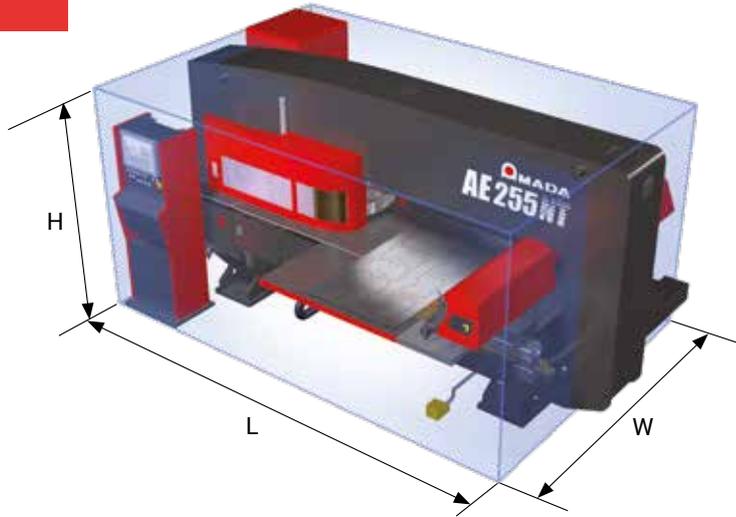

Without safety devices

## MACHINE SPECIFICATIONS

AE-NT Series			AE-255NT	AE-2510NT	AE-2610NT
Numerical control			AMNC-F		
Punching force		kN	200		
Drive system			Single AC servo drive		
Turret		Number of stations	45 ( 4 Auto Index stations)		
Controlled axes			X, Y, C, T + A		
Axis travel distance		X x Y mm	1270 x 1270	2500 x 1270	2500 x 1525
Maximum simultaneous feed rate		X / Y m/min	100		
Maximum hit rate:					
- punching (5 mm stroke / 25.4 mm pitch)		hpm	370	350	
- marking		hpm	900	900	
Punching accuracy		mm	± 0.1		
Work range without reposition		mm	1270 x 1270	2500 x 1270	2500 x 1525
Maximum sheet thickness for:					
- High speed floating brush table (option)		mm	3.2		
- High density brush table (option)		mm	6.4		
Maximum material mass		kg	500(F1), 1500(F4)		
Work chute (option) size		mm	300 x 300 (for material thickness 3.2 mm)		
Machine mass		kg	12000	12500	13800

Specifications, appearance and equipment are subject to change without notice by reason of improvement.



For Your Safe Use

Be sure to read the operator's manual carefully before use.

When using this product, appropriate personal protection equipment must be used.

The official model name of the machines and units described in this catalogue are non-hyphenated like AE2510NT. Use this registered model names when you contact the authorities for applying for installation, exporting, or financing.

The hyphenated spellings like AE-2510NT are used in some portions of the catalogue for sake of readability. This also applies to other machines.

Hazard prevention measures are removed in the photos used in this catalogue.

### AMADA UK LTD.

Spennells Valley Road,  
Kidderminster,  
Worcestershire DY10 1XS  
United Kingdom  
Tel: +44 (0)1562 749500  
Fax: +44 (0)1562 749510  
www.AMADA.co.uk

### AMADA SA

Paris Nord II  
96, avenue de la Pyramide  
F-93290 Tremblay  
France  
Tél : +33 (0)149903000  
Fax : +33 (0)149903199  
www.AMADA.fr

### AMADA GmbH

AMADA Allee 1  
42781 Haan  
Germany  
Tel: +49 (0)2104 2126-0  
Fax: +49 (0)2104 2126-999  
www.AMADA.de

### AMADA ITALIA S.r.l.

Via AMADA I., 1/3  
29010 Pontenure (PC)  
Italia  
Tel: +39 (0)523-872111  
Fax: +39 (0)523-872101  
www.AMADA.it

